




LP110WH3KMBWSA **WARM**

LP110WH4KMBWSA **COOL**



Lumi-Smoke[®]

Downlight integrated with world's smallest mains smoke alarm.

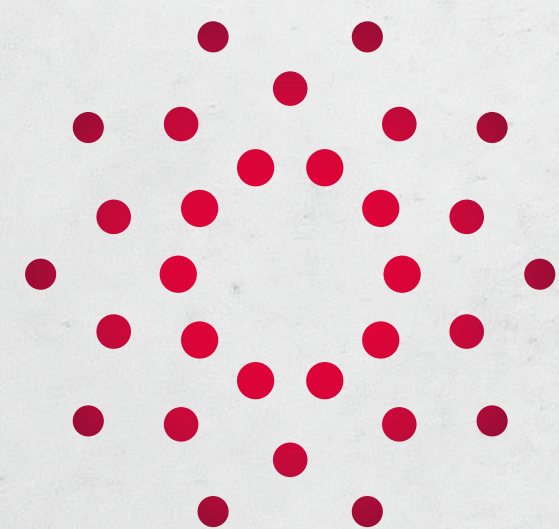


LUMI-PLUGIN[®]

Lumi-Plugin[®] Range.
Lumi-Plugin[®] Downlight.
Lumi-Smoke[®] Spec.
Lumi-Smoke[®] Features.


World's smallest mains smoke alarm _____

Lumi-Smoke[®] Features.

It's the smallest in the world because we think smoke alarms should be heard but not seen. Designed to click inside our Downlight, it connects wirelessly to our Lumi-Heat[®], One-Smoke[®] and One-Heat[®] alarms and then waits for the faintest sign of smoke.




Mains
powered

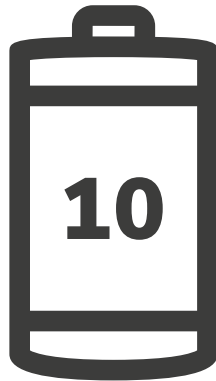


10-year
sealed battery




Wireless
connectivity



Fire-rated
30/60/90

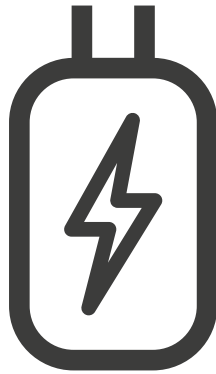


Pre-wired
junction box



Class 2


Find all the information you need to achieve streamlined results here. >



Lumi-Plugin[®] Range.
Lumi-Plugin[®] Downlight.
Lumi-Smoke[®] Spec.


World's smallest mains smoke alarm

Lumi-Smoke[®] Spec.

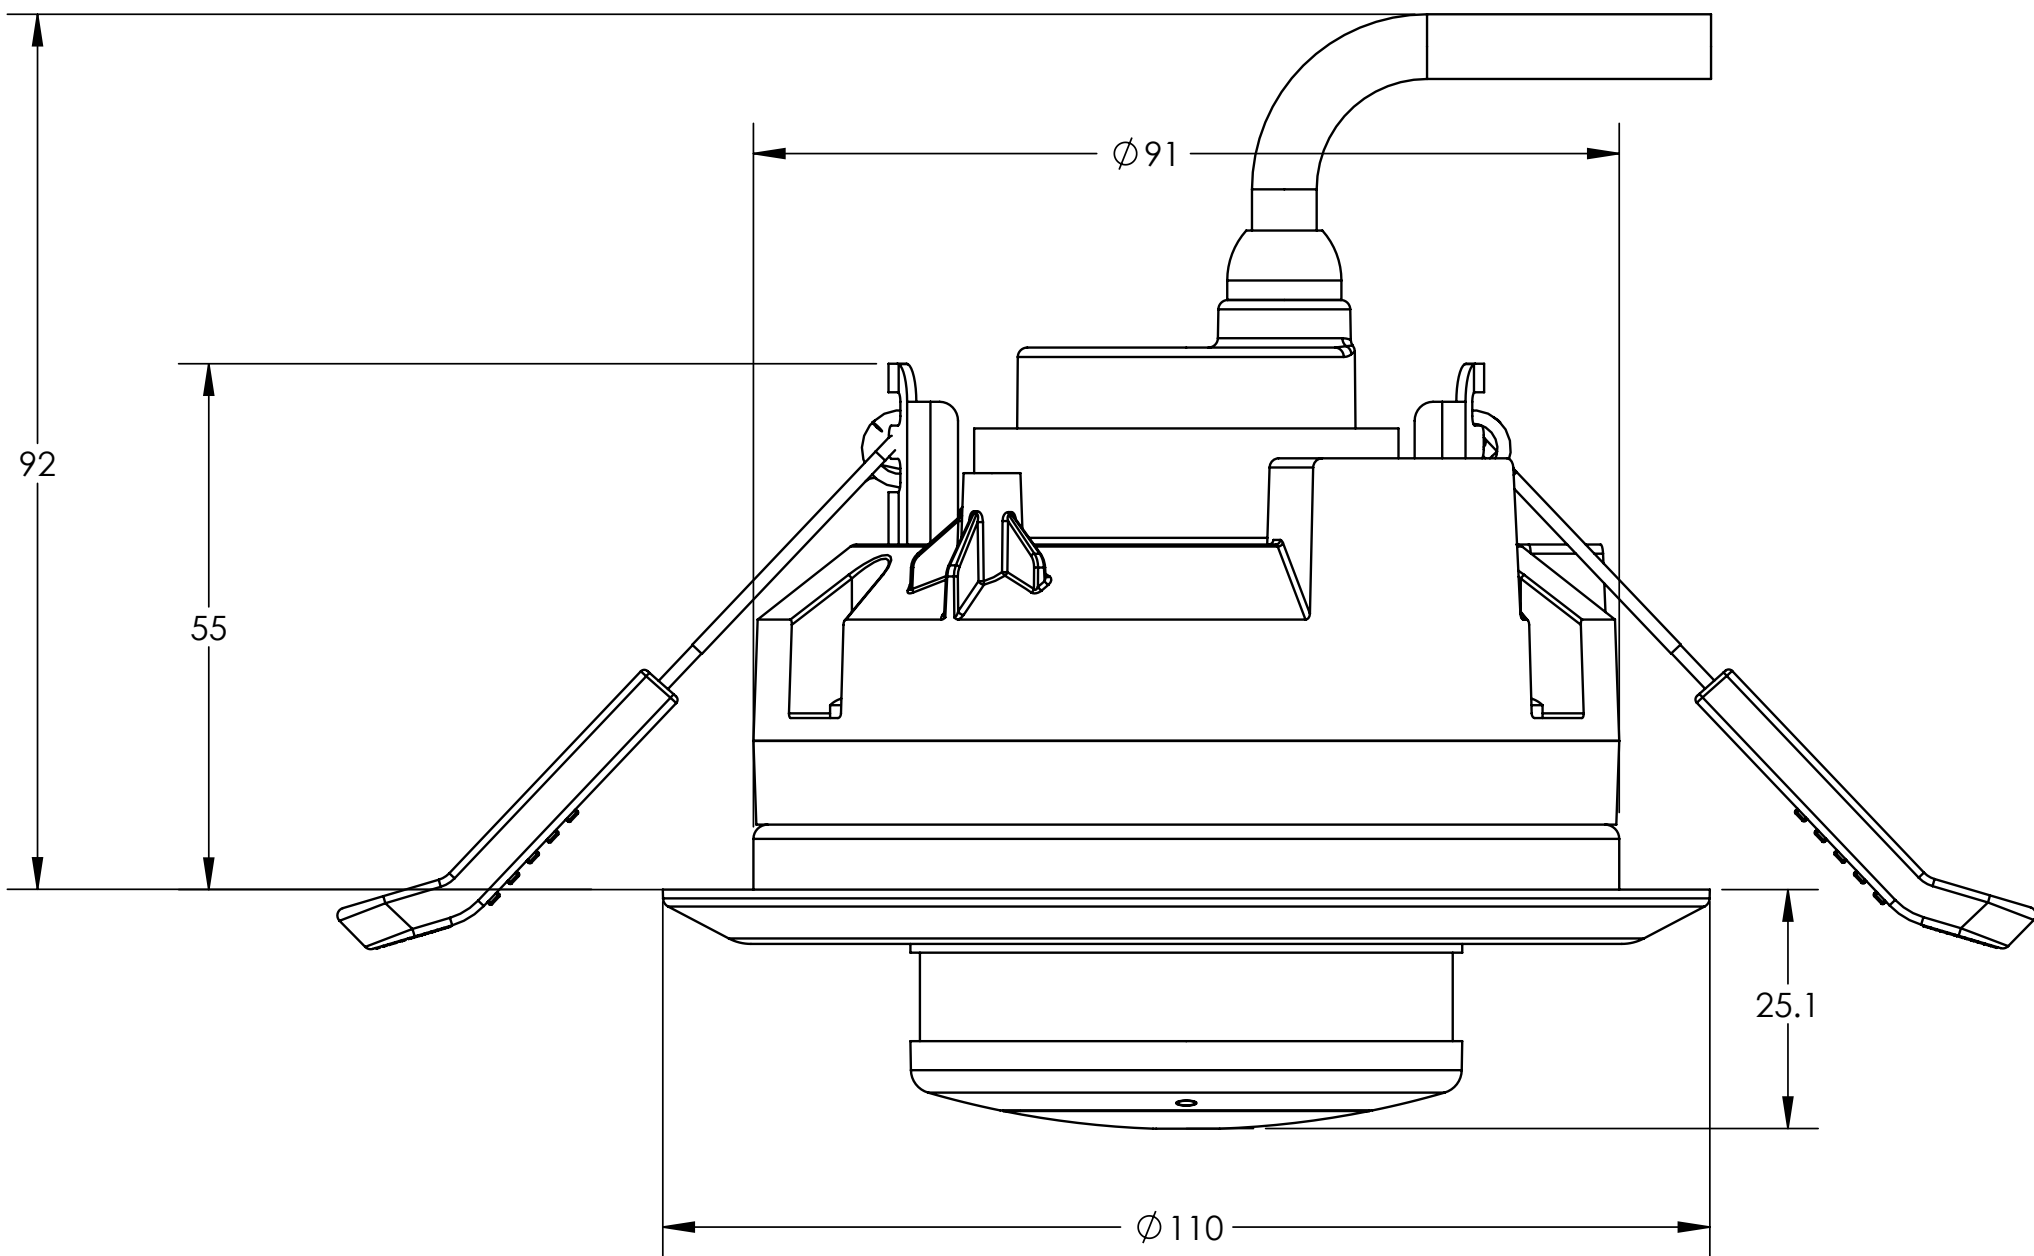

Voltage	110V AC, 230V DC		
Battery type	Non-replaceable CR2 10-year battery		
Interlink frequency	868MHz		
Operating temperature	-10°C to + 70°C		
Power consumption	161mAh in non-alarm condition		
Sound	Audible indicator minimum 85dB @ 3 metres in anechoic successive tones		
Fire-rated	30/60/90 – Solid Joist 30 – Metal Webbed Joist & I-Joist		
Class	2		
Complies to	BS 5839: Part 6 Grade D1		
Product colour	White		
Dimensions	Cut-out size	92mm	Diameter 110mm
	Height	117.1mm	Depth 92mm

Find all the information you need to achieve streamlined results here. >




1116
EN 14604:2005 + AC:2008
DoP No. 101-003

Lumi-Plugin[®] Range.
Lumi-Plugin[®] Downlight.


Integrated with _____

Lumi-Plugin® Downlight.

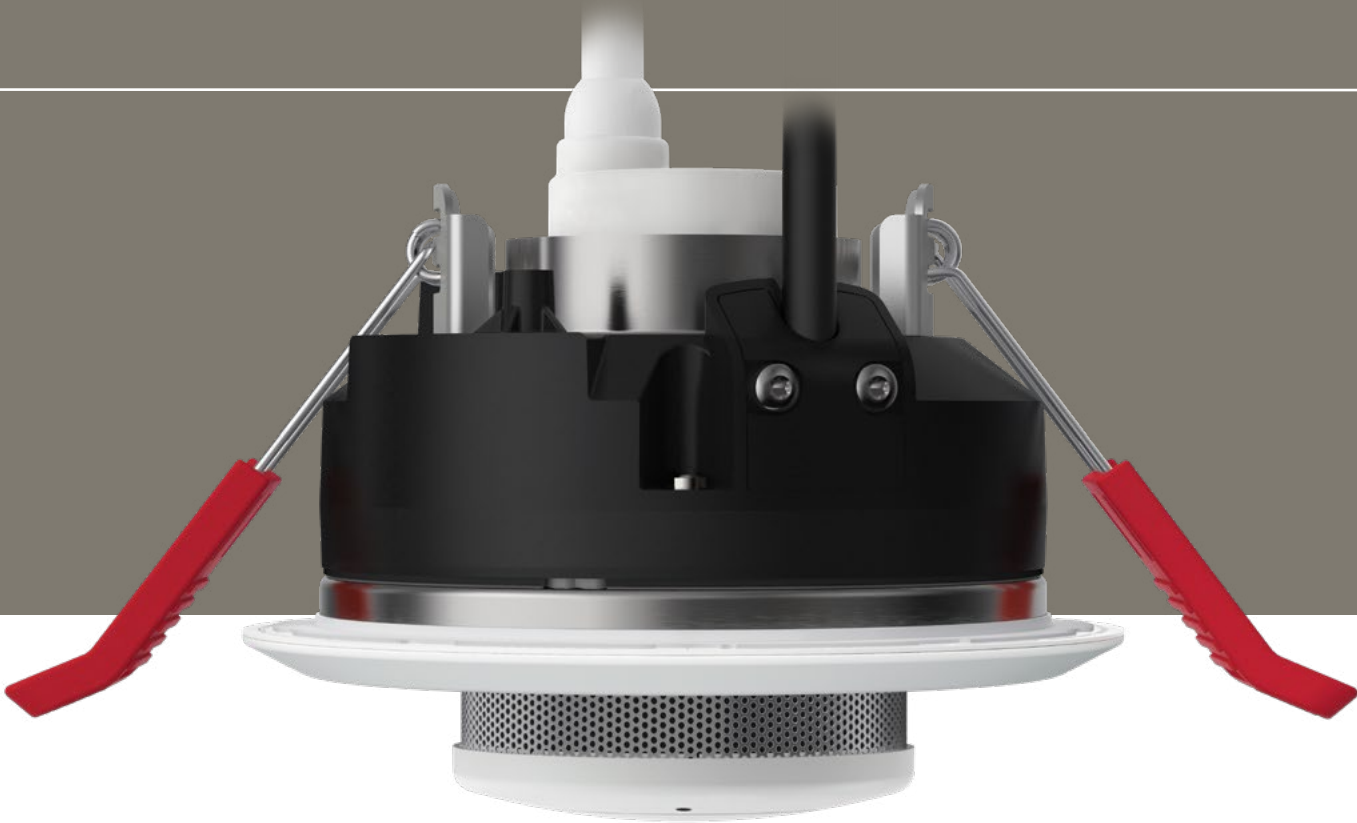

Designed to fit in every room and fit every plugin seamlessly. Our Downlight provides beautiful, sophisticated and contemporary lighting – guaranteed for 5 years. All plugins are reliable, compatible, and interchangeable to create streamlined ceilings and stylish interiors.


Lumens	600 lumens
Wattage	8.2W
Voltage	220-240V AC 50Hz
Dimmable	Trailing edge
Built-in driver	Yes
Colour temperature	3000K / 4000K
Guarantee / hours	5 years / 50,000 hours
Colour rendering index (CRI)	>80
Beam angle	100 degrees
kWh per 1000 hour life	10kWh
Luminaire efficiency	86.05lm/W
Energy rating	F
Fire-rated	30/60/90 – Solid Joist 30 – Metal Webbed Joist & I-Joist
Product colour	White



Reimagine lighting. _____

Lumi-Plugin® Range.

View our range of interchangeable
and easy-to-install plugins. >



Lumi-Plugin®
Downlight



Lumi-Smoke®



Lumi-Heat®



Lumi-CO®



Lumi-Sprinkler®



Lumi-Mist®



Lumi-Emergency®




Lumi-PIR®



One-Smoke®



One-Heat®

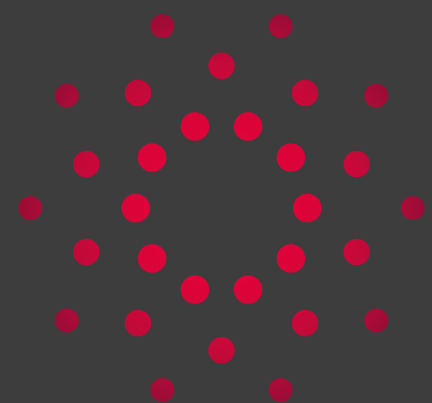

LUMI-PLUGIN®

+44 (0) 3303 801 329
hello@lumi-plugin.com
lumi-plugin.com

